



TATSA®
CALIDAD INDUSTRIAL DESDE 1955

SKID-MOUNTED LPG PLANT TANKS

FULLY EQUIPPED



GENERAL CHARACTERISTICS

Fully equipped, skid-mounted plant tanks. They are a practical and functional solution for the optimal storage of LPG.

Standard capacities are: 18,000 and 30,000 gallons.

TECHNICAL DATA

SPECIFICATIONS

- Design pressure 17.58 kg/cm² (~250 PSI).
 - Manway inlet with a minimum internal diameter of 406 mm (16 inches).
 - Internal piping for vapor service.
 - Metal skid.
 - Front support for dispensing.
 - External piping for loading and unloading transport vehicles.
 - Equipped with a 3" pump.
 - Optional meter.
- **LPG PLANT TANK:** Designed and manufactured in accordance with ASME code, Section VIII, Division 1, and NFPA 58.


BENEFITS:

- Put into operation within hours of delivery.
- Designed for easy installation and quick operation.
- Can be moved from one location to another as needed.
- Does not require special foundations.

INCLUDES:

- Valves.
- External piping.
- Front support for loading and unloading of transport vehicles.
- 3-inch pump with three-phase electric motor.
- Supply hoses.
- Emergency shutdown system.
- White coating with anti-corrosion protection system.

The customer is responsible for the installation of the equipment at the final site, and also for the local permits required for operation.

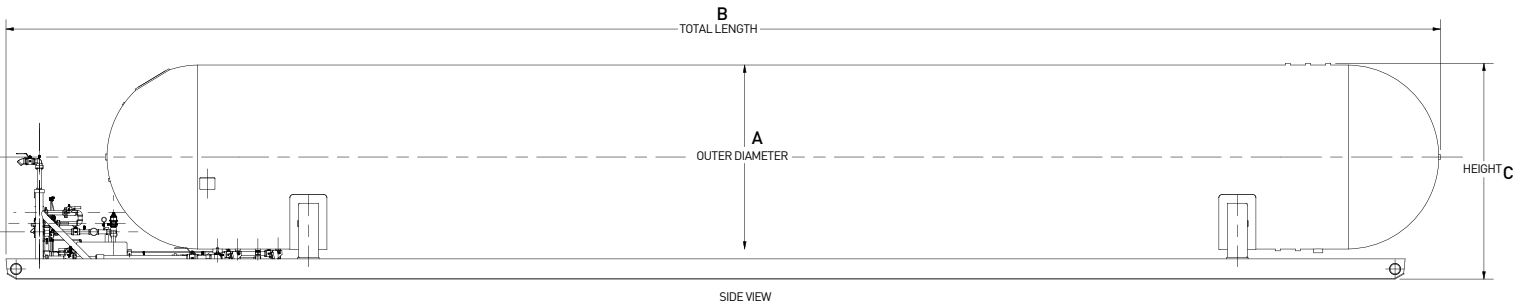

AVAILABLE CAPACITIES:

We offer the standard available capacities for our storage tank models.

NOMINAL CAPACITY		OUTER DIAMETER (A)		TOTAL LENGTH (B)		TOTAL HEIGHT (C)		TARE	
U.S. GALLONS	LITERS	INCHES	METERS	INCHES	METERS	INCHES	METERS	POUNDS	KG
18,000	68,130	109.346	2.777	549.375	13.954	127.221	3.231	36,455	16,536
30,000	113,550	109.346	2.777	851.375	21.625	128.3125	3.259	56,489	25,623
30,000	113,550	131.875	3.35	621.375	15.783	149.75	3.804	56,189	23,813